


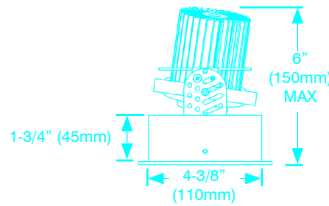
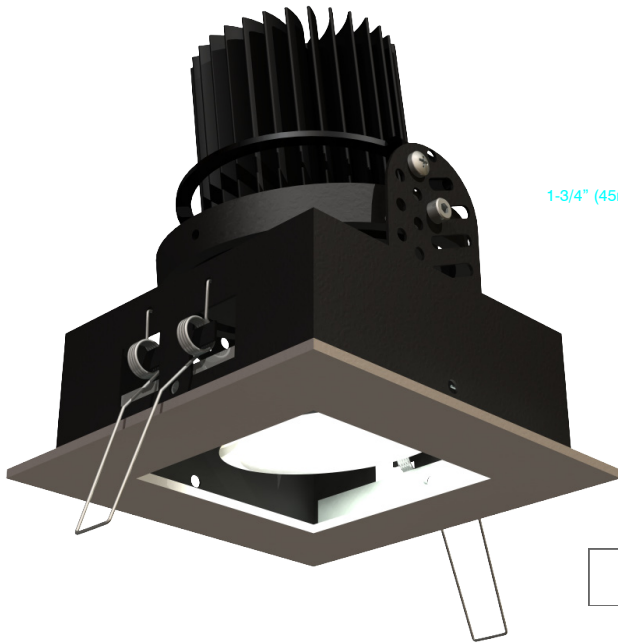




# LETO LED



4-3/4" x 4-3/4"  
(120mm x 120mm)

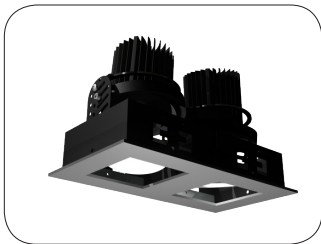

4-3/4" x 8-11/16"  
(120mm x 230mm)

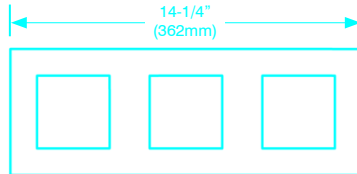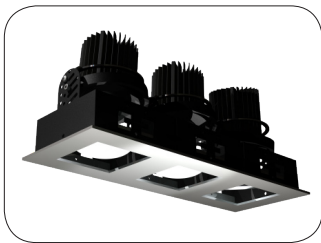

4-3/4" x 13-1/2"  
(120mm x 345mm)

| Luminous Flux<br>Consumption | CRI 80+      |               |               |               | CRI 95+      |               |
|------------------------------|--------------|---------------|---------------|---------------|--------------|---------------|
|                              | 700lm<br>13W | 1000lm<br>19W | 1300lm<br>22W | 2000lm<br>37W | 700lm<br>16W | 1000lm<br>23W |
| Colour T°                    |              |               |               |               |              |               |
| 2 700K                       | ●            | ●             | ●             |               | ●            |               |
| 3 000K                       | ●            | ●             | ●             |               | ●            |               |
| 3 500K                       |              | ●             | ●             |               |              |               |
| 4 000K                       | ●            | ●             | ●             |               | ●            |               |

● = available



www.sensolighting.com  
info@sensolighting.com  
T 403.216.7043  
F 403.216.7045



512 Manitou Road SE, Calgary, Alberta T2G 4C4

## SPEC SHEET

# LETO 1

recessed light fixture, square trim

This ceiling-mounted recessed LED light fixture fully adjusts to a 30° angle—great for retail spaces, hospitality and other commercial settings.

**LED technical:**

- consistent colour, uniform beam
- LED lifetime of 50,000 hours
- infrared and UV free beam
- IP 66 rated LED module

**fixture technical:**

- steel housing, aluminum trim
- satin powder coat finish
- available in one, two or three lights setup
- fully 30° angle adjustable spot
- standard 120V driver included, dimmable driver available (1300lm not available with standard dimming option)
- different existing LED module configurations, **consult the chart below for availability and specifications**
- contact us for custom lengths and shapes

please specify

- MODEL  670 - single  
 671 - twin  
 672 - triple

- COLOR RENDERING INDEX  580 - 80+  
 780 - 95+

- REFLECTOR  611 - 28°  
 612 - 42°  
 613 - 67°

- COLOUR  90 - 2700 K  
 70 - 3000 K  
 60 - 3500 K  
 40 - 4000 K

- FINISH  01 - white  
 02 - black  
 08 - silver

- LUMEN  07 - 700  
 10 - 1000  
 13 - 1300  
 20 - 2000

- DRIVER  STD - not dimmable  
 DIM - dimmable (n/a in 1300 lm)  
 LCS - 0-10V control

|          |         |
|----------|---------|
| QUANTITY | PROJECT |
|----------|---------|

|       |
|-------|
| NOTES |
|-------|