



PURE | EFFICIENT | PERENNIAL

LETO LED

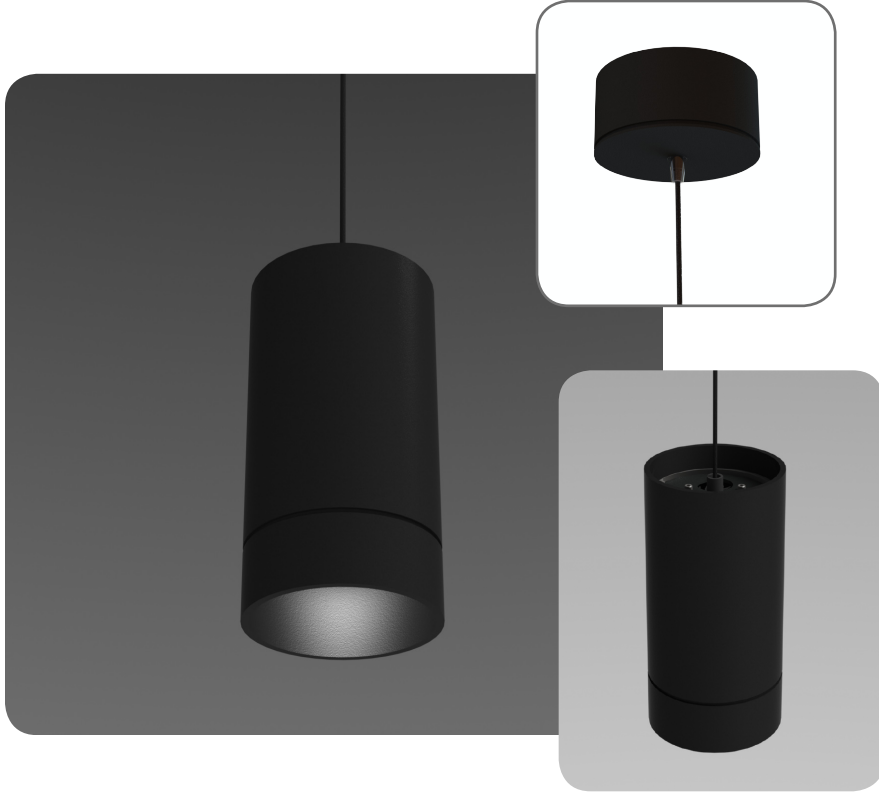

4-15/16"
(125mm)



8-5/8"
(220mm)

Luminous Flux Consumption	CRI 80+				CRI 95+	
	700lm 13W	1000lm 19W	1300lm 22W	2000lm 37W	700lm 16W	1000lm 23W
Colour T°						
2 700K	●	●	●	●	●	●
3 000K	●	●	●	●	●	●
3 500K	●	●	●	●	●	●
4 000K	●	●	●	●	●	●

● = available



www.sensolighting.com
info@sensolighting.com
T 403.216.7043
F 403.216.7045



512 Manitou Road SE, Calgary, Alberta T2G 4C4

PENDANT

SPEC SHEET

LETO 11

pendant light fixture

This pendant LED fixture is an excellent light choice for retail spaces, and other commercial settings.

LED technical:

- consistent colour, uniform beam
- LED lifetime of 50,000 hours
- infrared and UV free beam
- IP 66 rated LED module

fixture technical:

- aluminum construction
- satin powder coat finish
- standard 120V driver included, dimmable driver available (1300 lm and 2000 lm not available with dimming option)
- different existing LED module configurations, **consult the chart below for availability and specifications**

please specify

MODEL 695 - pendant

COLOR RENDERING INDEX 580 - 80+

780 - 95+

REFLECTOR 611 - 28°

612 - 42°

613 - 67°

COLOUR 90 - 2700 K

70 - 3000 K

60 - 3500 K

40 - 4000 K

FINISH

01 - white

02 - black

08 - silver

LUMEN

07 - 700

10 - 1000

13 - 1300

20 - 2000

DRIVER

STD - not dimmable

DIM - dimmable (n/a for 1300 lm and 2000 lm)

QUANTITY	PROJECT

NOTES