
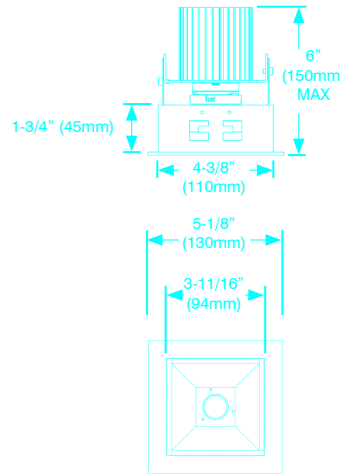


PURE | EFFICIENT | PERENNIAL

LETO LED



4-3/4" x 4-3/4"
(120mm x 120mm) 

Luminous Flux Consumption	CRI 80+				CRI 95+	
	700lm 13W	1000lm 19W	1300lm 22W	2000lm 37W	700lm 16W	1000lm 23W
Colour T°						
2 700K	●	●	●	●	●	●
3 000K	●	●	●	●	●	●
3 500K	●	●	●	●	●	●
4 000K	●	●	●	●	●	●

● = available



www.sensolighting.com
info@sensolighting.com
T 403.216.7043
F 403.216.7045



512 Manitou Road SE, Calgary, Alberta T2G 4C4

RECESSED

SPEC SHEET

LETO 9

recessed fixture, square reflector

This ceiling-mounted recessed LED fixture, with square trim, is ideal for hospitality, retail spaces and other commercial buildings.

LED technical:

- consistent colour, uniform beam
- LED lifetime of 50,000 hours
- infrared and UV free beam
- IP 66 rated LED module

fixture technical:

- steel housing, aluminum trim
- satin powder coat finish
- aluminum shade with diffusing surface
- holds in place with two spring clips
- standard 120V driver included, dimmable driver available (1300 lm and 2000 lm not available with standard dimming option)
- different existing LED module configurations, **consult the chart below for availability and specifications**

please specify

MODEL **676** - square reflector

COLOR RENDERING INDEX **580** - 80+

780 - 95+ (700 lm only)

REFLECTOR **616** - 45°

619 - 59°

COLOUR **90** - 2700 K

70 - 3000 K

60 - 3500 K

40 - 4000 K

FINISH **01** - white

02 - black

08 - silver

LUMEN **07** - 700

10 - 1000

13 - 1300

20 - 2000

DRIVER **STD** - not dimmable

DIM - dimmable (n/a for 1300 lm and 2000 lm)

LCS - 0-10V control

QUANTITY	PROJECT

NOTES